


Premium Rubber Edge


The Rubber Ramp Edge Tiles are available in 15mm, 20mm, 30mm & 40mm thicknesses and provide a safe transition to lower floor levels. Floor adhesive is required to fix the ramp tiles in place.



1m Length



3-4mm granules

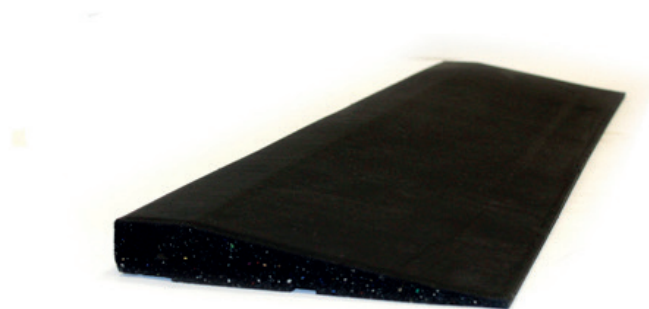

Technical Specifications

Tile Size	L 100cm x W 25cm x D 15/20/30/40mm
Tile Colour	Black
Tile Weight	15mm 3kg / 20mm 3.5kg / 30mm 4.5kg / 40mm 5.5kg
Base layer	3-4mm granules
Surface Layer	Surface layer fine granules with 15% EPDM black fleck
Floor Hardness	is 55+/-5 ShA
Installation	Floor adhesive is required to fix the ramp tiles in place.
Resistance to chemicals	Good resistance to acids, alkalis and salts. Contact with oils and hydrocarbons is not advisable and will damage the floor tiles.
Tools Required for Fitting	Stanley knife and Rubber hammer
Cleaning	Vacuum on general setting, then lightly mop with a micro fibre mop and water mixed with a ph neutral cleaner. Do not flood the floor with water.

Key Features

Easy Cleaning and bacteria-resistant	•
Provides a safe transition to lower floor levels	•
Improves traction, offers excellent shock absorption and allows for quicker acceleration	•
Absorption of noise	•